


PACKAGED AIR CONDITIONERS

- 2 to 5 ton, dedicated horizontal compressor with internal relief valve
- Heavy-gauge galvanized-steel cabinet
- Louvered condenser coil protection



13 SEER, R-22
GPC13H Distinctions™

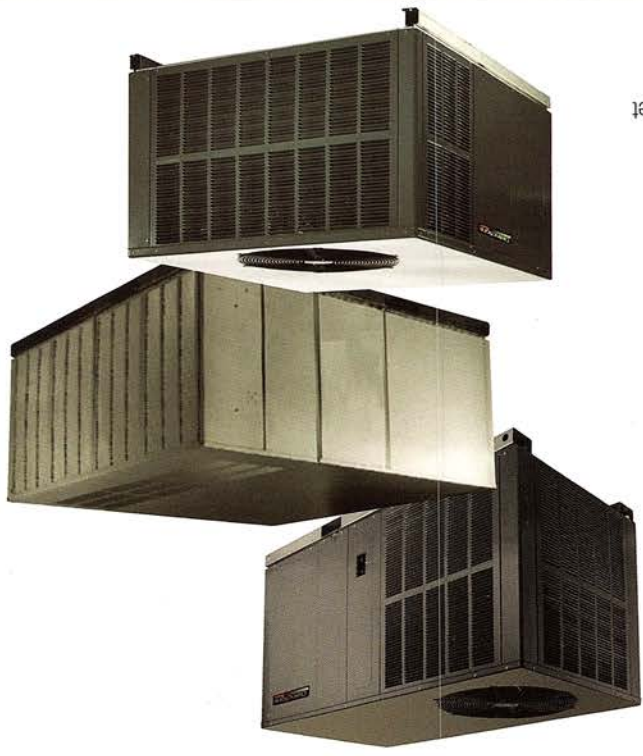

- 13 SEER, R-22
- 3 to 5 ton, three-phase energy-efficient compressor with internal relief valve
- Heavy-gauge galvanized-steel cabinet



10.3 EER, R-22
PGC Commercial

- 7.5 to 10 ton three-phase, convertible dual high-efficiency scroll compressors (two-stage cooling)
- Centrifugal fan for quiet and efficient operation
- High and low-pressure controls



13 SEER, R-22
GPC13M Distinctions™



- 2 to 5 ton, multi-position high-efficiency compressor with internal relief valve
- Heavy-gauge galvanized-steel cabinet
- Louvered condenser coil protection



13 SEER, R-22
GPH13M Distinctions™

- 13 SEER, R-22
- 3 to 5 ton, three-phase energy-efficient compressor with internal relief valve
- Heavy-gauge galvanized-steel cabinet




13 SEER, R-22
GPH13H Distinctions™

- 2 to 5 ton, dedicated horizontal energy-efficient compressor with internal relief valve
- Heavy-gauge galvanized-steel cabinet



PACKAGED GAS/ELECTRIC

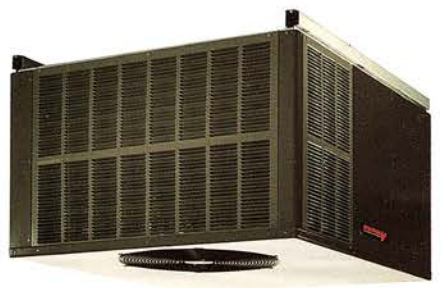

- 2 to 5 ton, multi-position, single-phase high-efficiency compressor, two-stage on 3, 4 and 5-ton models
- Patented Million Air™ stainless steel dual-diameter tubular heat exchanger
- Louvered condenser coil protection



APG15 15 SEER/80% AFUE, R-410A



- 2 to 5 ton, multi-position, single-phase energy-efficient compressor with internal relief valve
- Patented Million Air™ stainless steel dual-diameter tubular heat exchanger
- Louvered condenser coil protection

APG13 13 SEER/80% AFUE, R-22

90% GAS FURNACES



- Million Air™ stainless steel dual-diameter tubular heat exchanger
- Multi-position Two-stage, variable-speed SureStart™ silicon nitride igniter
- Low constant fan efficiently circulates air



AMV9 96% AFUE



- Million Air™ stainless steel dual-diameter tubular heat exchanger
- Multi-position Two-stage, variable-speed SureStart™ silicon nitride igniter
- Low constant fan efficiently circulates air



ACH9 93% AFUE

- TuffTube™ dual-diameter tubular heat exchanger
- Multi-position Two-stage gas valve, multi-speed Durable silicon nitride igniter
- Control board stores five diagnostics



GCH9 Distinctions™ 93% AFUE



AMH95 95% AFUE

- Million Air™ stainless steel dual-diameter tubular heat exchanger
- Multi-position Two-stage gas valve, multi-speed SureStart™ silicon nitride igniter
- Control board stores five diagnostics

- TuffTube™ dual-diameter tubular heat exchanger
- Uplow Single-stage, multi-speed Hot surface igniter



GKS9 Distinctions™ 92.1% AFUE



- TuffTube™ dual-diameter tubular heat exchanger
- Multi-position Two-stage gas valve, multi-speed Durable silicon nitride igniter
- Control board stores five diagnostics



GMH95 Distinctions™ 95% AFUE



80% GAS FURNACES



- Million Air™ stainless steel dual-diameter tubular heat exchanger
- Multi-position Two-stage, variable-speed SureStart™ silicon nitride igniter
- Low constant fan efficiently circulates air



AMV8/ADV8 80% AFUE

- Million Air™ stainless steel dual-diameter tubular heat exchanger
- Multi-position Two-stage gas valve, multi-speed SureStart™ silicon nitride igniter



AMH8 80% AFUE



- TuffTube™ dual-diameter tubular heat exchanger
- Downflow Two-stage gas valve, multi-speed Durable silicon nitride igniter
- Control board stores five diagnostics



GDH8 Distinctions™ 80% AFUE



- TuffTube™ dual-diameter tubular heat exchanger
- Downflow Single-stage, multi-speed Energy-saving, quiet, four-speed circulator motor
- Hot surface igniter



GMS8/GDS8 Distinctions™ 80% AFUE



GMS8/GDS8 Distinctions™ 80% AFUE



- TuffTube™ dual-diameter tubular heat exchanger
- Multi-position Single-stage, multi-speed Energy-saving, quiet, four-speed circulator motor
- Hot surface igniter
- High Static



GHS8 Distinctions™ 80% AFUE



- TuffTube™ dual-diameter tubular heat exchanger
- Multi-position Two-stage gas valve, multi-speed Durable silicon nitride igniter



GME8 Distinctions™ 80% AFUE



Our continuing commitment to quality products may mean a change in specifications without notice. © 2007 Goodman Manufacturing Company, L.P. • Houston TX
Amana® is a trademark of Maytag Corporation and is used under license to Goodman Company, L.P. • All rights reserved.

Amana
Heating & Air Conditioning
LASTS AND LASTS AND LASTS™

www.amana-hac.com



- 5" through 18" diameters
- Reinforced metallic polyester vapor barrier or polyethylene vapor barrier
- Standard length: 5 feet

Insulated Sleeve



- 3" through 20" diameters
- One layer of tough polyester film and one layer of metallized-polyester film encapsulating a high tensile galvanized-steel helix
- Temperature range is -20°F to 200°F intermittent

Uninsulated Connector



- 6", 8", 10", 12", 14", 16" and 18" diameters
- Extra heavy duty, UV inhibited polyethylene vapor barrier
- Galvanized, reinforced steel oversized core for easier installation
- Temperature range is -20°F to 200°F intermittent
- Available in 25' lengths for R-4.2, R-6.0 and R-8.0

Mobile Home Approved



- 4" to 20" standard diameters
- UV inhibited polyethylene vapor barrier
- Galvanized, reinforced steel oversized core for easier installation
- Temperature range is -20°F to 200°F intermittent
- Available in 25' and 50' lengths for R-4.2, R-6.0 and R-8.0

UV-inhibited Black Jacket



- 3" to 22" standard diameters
- Metallized polyester vapor barrier
- "Rip Stop" scrim reinforcement
- Galvanized, reinforced steel oversized core for easier installation
- Temperature range is -20°F to 200°F intermittent
- Available in 12 1/2', 25', and 50' lengths for R-4.2, R-6.0 and R-8.0

"Rip-Stop" Silver Jacket

SPLIT SYSTEM AIR CONDITIONERS



- ASX18 18 SEER**
- R-410A
 - Two-stage, high-efficiency scroll compressor
 - High-density foam compressor sound blanket
 - Unique sound control top for quiet operation
 - Long lasting Amana® quality and durability

GSX13 Distinctions™

- R-22
- High-efficiency scroll compressor
- Entire unit run-tested in factory before shipment
- Unique louvered sound control top for quiet operation
- Long lasting Amana® quality and durability



- ASX16 16 SEER**
- R-410A
 - Two-stage, high-efficiency scroll compressor
 - High-density foam compressor sound blanket
 - Unique sound control top for quiet operation
 - Long lasting Amana® quality and durability

GSX14 Distinctions™

- R-22
- High-efficiency scroll compressor
- Unique louvered sound control top for quiet operation
- Performance certified in accordance with the Air Conditioning and Refrigeration Institute (ARI)

- ASX14 14 SEER**
- R-410A
 - High-efficiency scroll compressor
 - High-density foam compressor sound blanket
 - Unique sound control top for quiet operation
 - Long lasting Amana® quality and durability

GSX13 Distinctions™

- R-22
- Energy-efficient compressor
- Unique louvered sound control top for quiet operation
- Long lasting Amana® quality and durability

- ASX13 13 SEER**
- R-22
 - Energy-efficient scroll compressor
 - High-density foam compressor sound blanket
 - Unique sound control top for quiet operation
 - Long lasting Amana® quality and durability

GSC Commercial 10 EER

- R-22
- Energy-efficient compressor
- Ground level or rooftop mount installation
- Powder paint, galvanized heavy-gauge steel cabinet
- Long lasting Amana® quality and durability



- ASZ18 18 SEER**
- R-410A
 - Two-stage, high-efficiency scroll compressor
 - High-density foam compressor sound blanket
 - Unique sound control top for quiet operation
 - Long lasting Amana® quality and durability

GSZ13 Distinctions™

- R-410A
- Heats and cools your home
- Energy-efficient compressor
- Entire unit run-tested in factory before shipment
- Unique louvered sound control top for quiet operation
- Long lasting Amana® quality and durability



- ASZ16 16 SEER**
- R-410A
 - Two-stage, high-efficiency scroll compressor
 - High-density foam compressor sound blanket
 - Unique sound control top for quiet operation
 - Long lasting Amana® quality and durability

GSZ14 Distinctions™

- R-22
- High-efficiency scroll compressor
- Unique louvered sound control top for quiet operation
- Performance certified in accordance with the Refrigeration Institute (ARI)

- ASZ14 14 SEER**
- R-410A
 - High-efficiency scroll compressor
 - High-density foam compressor sound blanket
 - Unique sound control top for quiet operation
 - Long lasting Amana® quality and durability

GSZ13 Distinctions™

- R-22
- Energy-efficient compressor
- Unique louvered sound control top for quiet operation
- Long lasting Amana® quality and durability

- ASZ13 13 SEER**
- R-22
 - Energy-efficient scroll compressor
 - High-density foam compressor sound blanket
 - Unique sound control top for quiet operation
 - Long lasting Amana® quality and durability

GSH Commercial 10 EER

- R-22
- Energy-efficient compressor
- Ground level or rooftop mount installation
- Powder paint, galvanized heavy-gauge steel cabinet
- Long lasting Amana® quality and durability

SPLIT SYSTEM HEAT PUMPS

Our continuing commitment to quality products may mean a change in specifications without notice. © 2008 Goodman Manufacturing Company, L.P. • Houston TX

www.goodmanmfg.com



- 5" through 18" diameters
- Reinforced metallic polyester vapor barrier or polyethylene vapor barrier
- Standard length: 5 feet

Insulated Sleeve



- 3" through 20" diameters
- One layer of tough polyester film and one layer of metallized-polyester film encapsulating a high tensile galvanized steel helix
- Temperature range is -20°F to 200°F intermittent

Uninsulated Connector



- 6", 8", 10", 12", 14", 16" and 18" diameters
- Extra heavy duty, UV inhibited polyethylene vapor barrier
- Galvanized, reinforced steel
- Temperature range is -20°F to 200°F intermittent
- Available in 25' lengths for R-4.2, R-6.0 and R-8.0

Mobile Home Approved



- 4" - 20" standard diameters
- UV inhibited polyethylene vapor barrier
- Galvanized, reinforced steel
- Temperature range is -20°F to 200°F intermittent
- Available in 25' and 50' lengths for R-4.2, R-6.0 and R-8.0

UV-inhibited Black Jacket



- 3" - 22" standard diameters
- Metallized polyester vapor barrier
- "Rip Stop" scrim reinforcement
- Galvanized, reinforced steel
- Temperature range is -20°F to 200°F intermittent
- Available in 12 1/2', 25', and 50' lengths for R-4.2, R-6.0 and R-8.0

"Rip-Stop" Silver Jacket

uiflex FLEXDUCT

Air Conditioning & Heating





SPLIT SYSTEM AIR CONDITIONERS



- 2 to 5 ton, R-410A
- High-efficiency scroll compressor
- Entire unit run-tested in factory before shipment
- Unique lowered sound control top for quiet operation
- Legendary Goodman® quality and durability

SSX16 – 16 SEER



- 1 1/2 to 5 ton, R-410A
- High-efficiency scroll compressor
- Entire unit run-tested in factory before shipment
- Unique lowered sound control top for quiet operation
- Legendary Goodman® quality and durability

SSX14 – 14 SEER



- 1 1/2 to 5 ton, R-410A
- Energy-efficient compressor
- Entire unit run-tested in factory before shipment
- Unique lowered sound control top for quiet operation
- Legendary Goodman® quality and durability

GSX13 – 13 SEER



GSX14 – 14 SEER



- 1 1/2 to 5 ton, R-22
- High-efficiency scroll compressor
- Entire unit run-tested in factory before shipment
- Unique lowered sound control top for quiet operation
- Legendary Goodman® quality and durability

GSX13 – 13 SEER



- 1 1/2 to 5 ton, R-22
- Energy-efficient compressor
- Entire unit run-tested in factory before shipment
- Unique lowered sound control top for quiet operation
- Legendary Goodman® quality and durability

GSC Commercial – 10 EER



- 7 1/2 to 10 ton, R-22
- Energy-efficient compressor with internal pressure relief valve
- High-capacity, steel-cased filter dryer
- High- and low-pressure switches
- Brass liquid and suction line service valve mounted at a 90° angle with sweat connections and service ports

SPLIT SYSTEM HEAT PUMPS



- 2 to 5 ton, R-410A
- Heats and cools your home
- High-efficiency scroll compressor
- Entire unit run-tested in factory before shipment
- Unique lowered sound control top for quiet operation
- Legendary Goodman® quality and durability

SSZ16 – 16 SEER/9.75 HSPF



- 1 1/2 to 5 ton, R-410A
- Heats and cools your home
- High-efficiency scroll compressor
- Entire unit run-tested in factory before shipment
- Unique lowered sound control top for quiet operation
- Legendary Goodman® quality and durability

SSZ14 – 14 SEER/9.0 HSPF



GSX14 – 14 SEER/8.2 HSPF



- 1 1/2 to 5 ton, R-22
- Heats and cools your home
- High-efficiency scroll compressor
- Entire unit run-tested in factory before shipment
- Unique lowered sound control top for quiet operation
- Legendary Goodman® quality and durability

GSX13 – 13 SEER/7.7 HSPF



- 1 1/2 to 5 ton, R-22
- Heats and cools your home
- Energy-efficient compressor
- Entire unit run-tested in factory before shipment
- Unique lowered sound control top for quiet operation
- Legendary Goodman® quality and durability

GSH Commercial – 10 EER



- 7 1/2 to 10 ton, R-22
- Energy-efficient compressor with internal pressure relief valve
- High-capacity, steel-cased filter dryer
- High- and low-pressure switches
- Brass liquid and suction line service valve mounted at a 90° angle with sweat connections and service ports

AIR HANDLERS



AEPF Multi-Position

- R-410A or R-22, multi-position, variable-speed
- 1 1/2 to 5 ton
- Low CFM for efficient fan-only operation
- Factory sealed to optimize performance



ASPF Multi-Position

- R-410A or R-22, multi-position
- 1 1/2 to 5 ton
- Energy-efficient, fixed-speed motor (CEM)
- Factory sealed to optimize performance



ARPF Multi-Position

- R-410A or R-22, multi-position
- 1 1/2 to 5 ton
- Direct-drive, multi-speed motor
- Factory sealed to optimize performance



ADPF Downflow

- R-410A or R-22
- 1 1/2 to 5 ton
- Direct-drive, multi-speed motor
- Dedicated downflow design requires no field modification



ARUF Multi-Position

- R-410A or R-22
- 1 1/2 to 5 ton
- Direct drive, multi-speed motor
- Compatible with cooling-only and heat pump applications



AR Commercial

- 7 1/2 to 10 ton
- Multi-position, multi-speed
- Draw-thru configural blower is belt driven for quiet, efficient operation
- Electric heat kits available as field-installed



MBE/MBR Modular Blower

- MBE is variable-speed, MBR is multi-speed
- Compatible with cooling and heat pump units
- Upflow, downflow, and horizontal



AWUF Wall Mount

- R-22, variable-speed
- 1 1/2 to 3 ton
- Direct-drive, multi-speed motor
- Check flowrater for cooling-only and heat pump applications



ACNF Ceiling Mount

- R-22
- 1 1/2 to 2 1/2 ton
- Direct-drive, multi-speed motor
- Quiet operation
- Easy service access



- R-410A or R-22
- Upflow, downflow
- Rust-proof, high-temperature, thermoplastic drain pans



CAUF - Uncased



CAPF - Cased

- R-410A or R-22
- Upflow, downflow
- Rust-proof, high-temperature, thermoplastic drain pans



- R-410A or R-22
- Horizontal "A"
- Rust-proof, high-temperature, thermoplastic drain pans



CHPF - Cased



CSCF - Slab

- R-410A or R-22
- Horizontal
- Rust-proof, high-temperature, thermoplastic drain pans




PACKAGED GAS/ELECTRIC - COMMERCIAL

PG13 & 10 Commercial
13 & 10 SEER/80% AFUE, R-22

20 YEAR LIMITED HEAT EXCHANGER WARRANTY
5 YEAR LIMITED PARTS WARRANTY

- 3 to 5 ton, multi-position, three-phase
- Energy-efficient compressor with internal relief valve
- TurfTube™ dual-diameter tubular heat exchanger

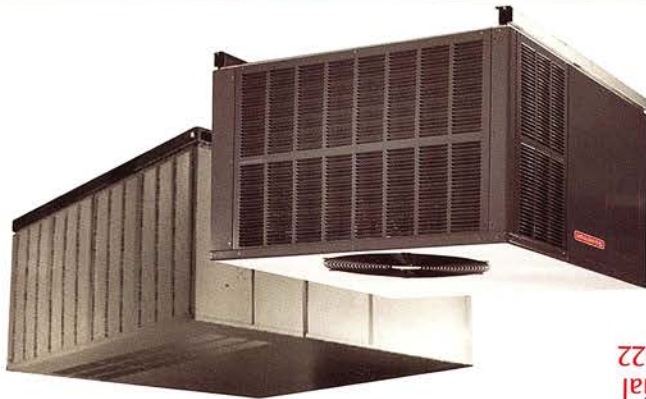

PGC Commercial
10.3 EER/80% AFUE, R-22

20 YEAR LIMITED HEAT EXCHANGER WARRANTY
5 YEAR LIMITED PARTS WARRANTY

- 7.5 to 10 ton, convertible, three-phase
- Dual high-efficiency scroll compressors (two-stage cooling)
- Aluminumized-steel, tubular heat exchanger

INDOOR AIR QUALITY

GHEPA/GDMHEPA

5 YEAR LIMITED PARTS WARRANTY

- Whole house capacity, certified true HEPA filtration
- Protect efficiency of heating and cooling system
- Removes 99.97% of air contaminants down to 0.3 micron size



GSAS

5 YEAR LIMITED PARTS WARRANTY

- High-efficiency electronic air cleaner
- Environmentally-friendly lifetime filtration system
- Removes contaminants down to 0.01 micron size



GGM Grill

5 YEAR LIMITED PARTS WARRANTY

- High-efficiency electronic air cleaner
- Removes airborne contaminants down to 0.01 micron size
- Performance indicator light ensures unit is operating properly



GMU Media

LIFETIME LIMITED WARRANTY

- High efficiency MERV 11 media filter rating
- Removes contaminants down to 0.3 micron size
- No electrical or electronic parts



GRAM Right Angle Media

5 YEAR LIMITED PARTS WARRANTY

- High efficiency MERV 11 media filter rating
- Removes airborne contaminants down to 0.3 micron size
- No electrical or electronic parts



GBB Builder's Media

LIFETIME LIMITED WARRANTY

- High efficiency MERV 11 media filter rating
- Removes airborne contaminants down to 0.3 micron size
- No electrical or electronic parts



HUM Humidifiers

1 YEAR LIMITED PARTS WARRANTY

- Whole house, bypass and fan powered, high-capacity
- Improved wicking and water distribution system
- Low profile unit for limited space installations



HRV/ERV

5 YEAR LIMITED PARTS WARRANTY

- Recovery ventilators
- Easy to install and service
- Washable, electrostatic, panel-type air filters



UVX Ultraviolet Purifiers

3 YEAR LIMITED PARTS WARRANTY

- Air and object purifiers
- Destroys chemical and biological odors, including bacteria, viruses, mold and volatile organic compounds (VOC)



Thank goodness for Goodman.™

PACKAGED GAS/ELECTRIC - Commercial

- 7.5 to 10 ton
- Three-phase, convertible
- Dual high-efficiency scroll compressors (two-stage cooling)
- Centrifugal fan for quiet and efficient operation
- High and low-pressure controls

PGC Commercial
 10.3 EER, R-22
 5-YEAR LIMITED WARRANTY
 20-YEAR LIMITED WARRANTY



- 13 and 10 SEER, R-22
- Energy-efficient compressor with internal relief valve™
- Patented TurfTube™ dual-diameter tubular heat exchanger

GG13/GG10 Commercial
 13 SEER/10 SEER 80% AFUE
 5-YEAR LIMITED WARRANTY
 20-YEAR LIMITED WARRANTY

INDOOR AIR QUALITY

AHEPA/ADMHEPA

- Whole house capacity, certified true HEPA filtration
- Protect efficiency of heating and cooling system
- Removes 99.97% of air contaminants down to 0.3 micron size



5-YEAR LIMITED WARRANTY

ASAS

- High-efficiency electronic air cleaner
- Environmentally-friendly lifetime filtration system
- Removes contaminants down to 0.01 micron size



5-YEAR LIMITED WARRANTY

AGM Grill Mount

- High-efficiency electronic air cleaner
- Removes airborne contaminants down to 0.01 micron size
- Performance indicator light ensures unit is operating properly



5-YEAR LIMITED WARRANTY

AMU Media

- High-efficiency MERV 11 media filter rating
- Removes contaminants down to 0.3 micron size
- No electrical or electronic parts



LIFETIME LIMITED WARRANTY

ATEAC Charged-Media

- Highest efficiency for an 1" electronic air cleaner
- Removes contaminants down to 0.01 micron size
- Does not produce hazardous ozone or positive ions
- Environmentally-friendly filtration system



2-YEAR LIMITED WARRANTY

ARAM Right Angle Media

- High-efficiency MERV 11 media filter rating
- Removes airborne contaminants down to 0.3 micron size
- No electrical or electronic parts



5-YEAR LIMITED WARRANTY

ABB Builder's Media

- High-efficiency MERV 11 media filter rating
- Removes airborne contaminants down to 0.3 micron size
- No electrical or electronic parts



LIFETIME LIMITED WARRANTY

HUM Humidifiers

- Whole house, bypass and fan powered, high-capacity
- Improved wicking and water distribution system
- Low profile unit for limited space installations



1-YEAR LIMITED WARRANTY

HRV/ERV

- Recovery ventilators
- Easy to install and service
- Washable, electrostatic, panel-type air filters



5-YEAR LIMITED WARRANTY

UVX Ultraviolet Purifiers

- Air and object purifiers
- Destroys chemical and biological odors, including bacteria, viruses, mold and volatile organic compounds (VOC)



3-YEAR LIMITED WARRANTY

AIR HANDLERS



- R-410A or R-22, multi-position, variable-speed
- 1 1/2 to 5 ton
- Low CFM for efficient fan-only operation
- Factory sealed to optimize performance




AEPF Multi-Position



- R-410A or R-22, multi-position
- 1 1/2 to 5 ton
- Energy-efficient, fixed-speed motor (EEM)
- Factory sealed to optimize performance



ASPF Multi-Position

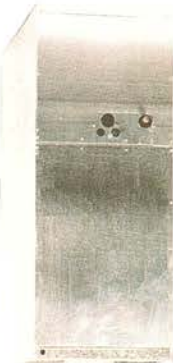

- R-410A or R-22, multi-position
- 1 1/2 to 5 ton
- Direct-drive, multi-speed motor
- Factory sealed to optimize performance



ARPF Multi-Position



- R-410A or R-22
- 1 1/2 to 5 ton
- Direct-drive, multi-speed motor
- Dedicated downflow design requires no field modification



ADPF Downflow

- R-410A or R-22
- 1 1/2 to 5 ton
- Direct-drive, multi-speed motor
- Compatible with cooling-only and heat pump applications



ARUF Multi-Position



- MBE is variable-speed, MBR is multi-speed
- Compatible with cooling and heat pump units
- Uplow, downflow, and horizontal



MBE/MBR Modular Blower



- R-22
- 1 1/2 to 3 ton
- Direct-drive, multi-speed motor
- Check flowrater for cooling-only and heat pump applications



AWUF Wall Mount



- R-22
- 1 1/2 to 2 1/2 ton
- Direct-drive, multi-speed motor
- Quiet operation
- Easy service access



ACNF Ceiling Mount

- R-410A or R-22
- Uplow, downflow
- Rust-proof, high-temperature, thermoplastic drain pans



CAUF Uncased



- R-410A or R-22
- Uplow, downflow
- Rust-proof, high-temperature, thermoplastic drain pans



CAPF Cased



- R-410A or R-22
- Horizontal "A"
- Rust-proof, high-temperature, thermoplastic drain pans



CHPF Cased



- R-410A or R-22
- Horizontal
- Rust-proof, high-temperature, thermoplastic drain pans




CSCF Slab



COILS



PACKAGED AIR CONDITIONERS

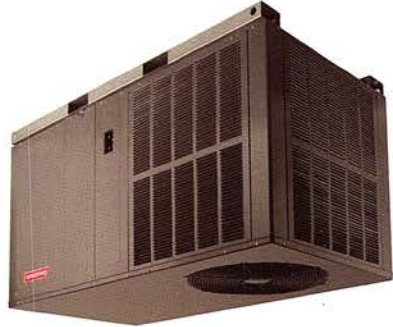

- 2 to 5 ton, dedicated horizontal internal relief valve
- Energy-efficient compressor with heavy-gauge galvanized-steel cabinet
- Louvered condenser coil protection



GP13H – 13 SEER, R-22

- 3 to 5 ton
- Energy-efficient compressor with internal relief valve
- Heavy-gauge galvanized-steel cabinet
- Louvered condenser coil protection




GP13M – 13 SEER, R-22

- 3 to 5 ton, three-phase
- Energy-efficient compressor with internal relief valve
- Heavy-gauge galvanized-steel cabinet



GP13M Commercial
13 SEER, R-22

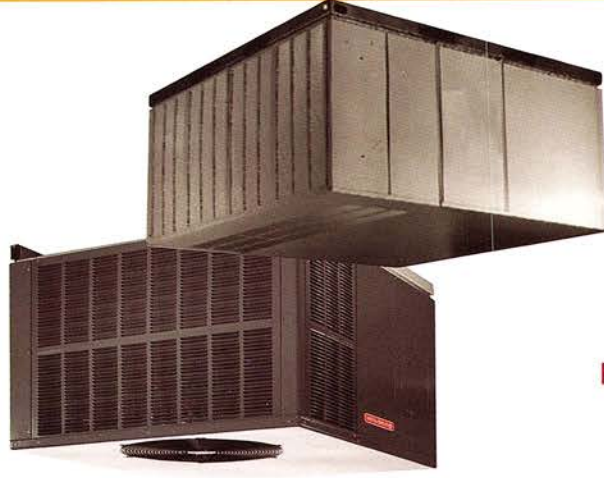

- 7.5 to 10 ton
- Three-phase, convertible
- Dual high-efficiency scroll compressors (two-stage cooling)
- Centrifugal fan for quiet and efficient operation
- High and low-pressure controls




PCC Commercial
10.3 EER, R-22

PACKAGED HEAT PUMPS

- 2 to 5 ton, multi-position
- High-efficiency compressor with internal relief valve
- Heavy-gauge galvanized-steel cabinet
- Louvered condenser coil protection



GP15M
15 SEER, R410A

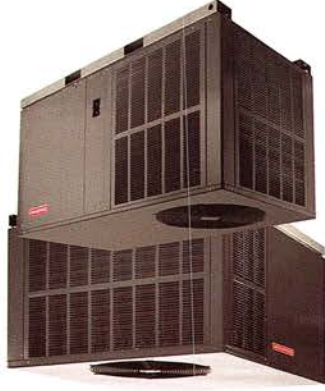

- 2 to 5 ton, dedicated horizontal internal relief valve
- Energy-efficient compressor with heavy-gauge galvanized-steel cabinet



GP13H
13 SEER, R-22

- 2 to 5 ton, multi-position
- Energy-efficient compressor with internal relief valve
- Heavy-gauge galvanized-steel cabinet
- Louvered condenser coil protection



GP13M
13 SEER, R-22

- 3 to 5 ton, three-phase
- Energy-efficient compressor with internal relief valve
- Heavy-gauge galvanized-steel cabinet



GP13M Commercial
13 SEER, R-22



GP15 – 15 SEER/
80% AFUE, R-410A

- 2 to 5 ton, multi-position, single-phase
- High-efficiency compressor, two-stage on 3, 4 & 5-ton models
- TuffTube™ dual-diameter tubular heat exchanger
- Louvered condenser coil protection

GP13 – 13 SEER/
80% AFUE, R-22

- 2 to 5 ton, multi-position, single-phase
- Energy-efficient compressor with internal relief valve
- TuffTube™ dual-diameter tubular heat exchanger
- Louvered condenser coil protection

PACKAGED GAS/ELECTRIC



GP15 – 15 SEER/
80% AFUE, R-410A

- 2 to 5 ton, multi-position, single-phase
- High-efficiency compressor, two-stage on 3, 4 & 5-ton models
- TuffTube™ dual-diameter tubular heat exchanger
- Louvered condenser coil protection

GP13 – 13 SEER/
80% AFUE, R-22

- 2 to 5 ton, multi-position, single-phase
- Energy-efficient compressor with internal relief valve
- TuffTube™ dual-diameter tubular heat exchanger
- Louvered condenser coil protection

90% GAS FURNACES



- TuffTube™ dual-diameter tubular heat exchanger
- Upflow
- Single-stage, multi-speed
- Hot surface igniter

GK99 – 92.1% AFUE

- TuffTube™ dual-diameter tubular heat exchanger
- Multi-position
- Two-stage, variable-speed
- Durable silicon nitride igniter
- Dual-certified direct vent (2-pipe) or non-direct vent (1-pipe)

GCV9 – 93% AFUE

- TuffTube™ dual-diameter tubular heat exchanger
- Multi-position
- Two-stage, variable-speed
- Durable silicon nitride igniter
- Dual-certified direct vent (2-pipe) or non-direct vent (1-pipe)

GMV95 – 95% AFUE

- TuffTube™ dual-diameter tubular heat exchanger
- Multi-position
- Two-stage gas valve, multi-speed
- Durable silicon nitride igniter
- Control board stores five diagnostics

GCH9 – 93% AFUE

- TuffTube™ dual-diameter tubular heat exchanger
- Multi-position
- Two-stage gas valve, multi-speed
- Durable silicon nitride igniter
- Control board stores five diagnostics

GMH95 – 95% AFUE

80% GAS FURNACES

- TuffTube™ dual-diameter tubular heat exchanger
- Multi-position
- Single-stage, multi-speed
- Hot surface igniter
- Four-speed blower motor


GMS8 – 80% AFUE

- TuffTube™ dual-diameter tubular heat exchanger
- Multi-position
- Two-stage gas valve, multi-speed
- Durable silicon nitride igniter
- Control board stores five diagnostics

GMH8 – 80% AFUE

- TuffTube™ dual-diameter tubular heat exchanger
- Multi-position
- Two-stage gas valve, multi-speed
- Super efficient EEM circulator motor
- Durable silicon nitride igniter
- Control board stores five diagnostics

GME8 – 80% AFUE

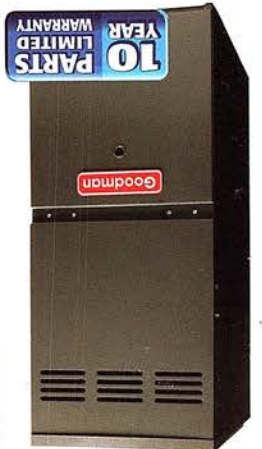

- TuffTube™ dual-diameter tubular heat exchanger
- Downflow
- Single-stage, multi-speed
- Hot surface igniter
- Four-speed blower motor

GD88 – 80% AFUE

- TuffTube™ dual-diameter tubular heat exchanger
- Downflow
- Two-stage gas valve, multi-speed
- Durable silicon nitride igniter
- Control board stores five diagnostics

GDH8 – 80% AFUE



- TuffTube™ dual-diameter tubular heat exchanger
- Multi-position
- Single-stage, multi-speed
- Hot surface igniter
- Four-speed blower motor
- High static 9h

GHS8 – 80% AFUE

